

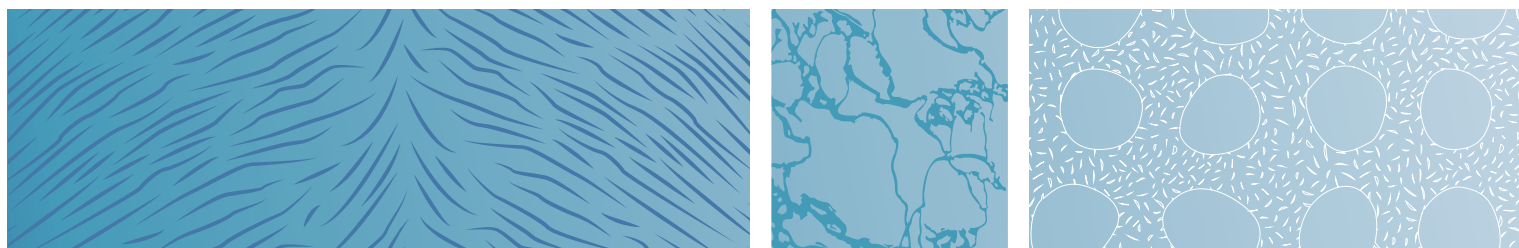
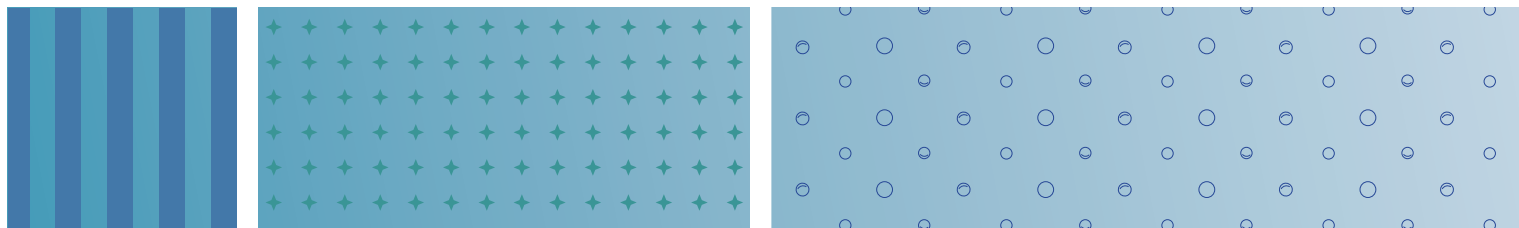
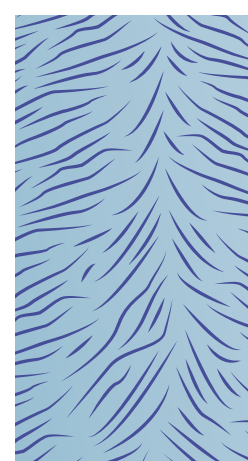
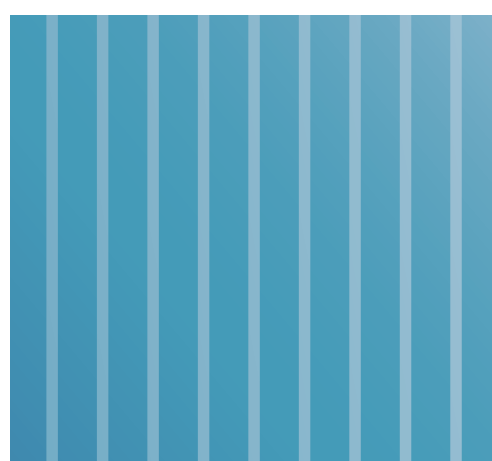



Glass for decoration

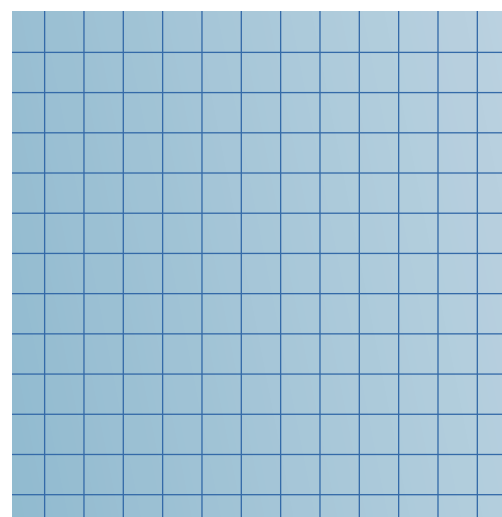

GLASS UNLIMITED

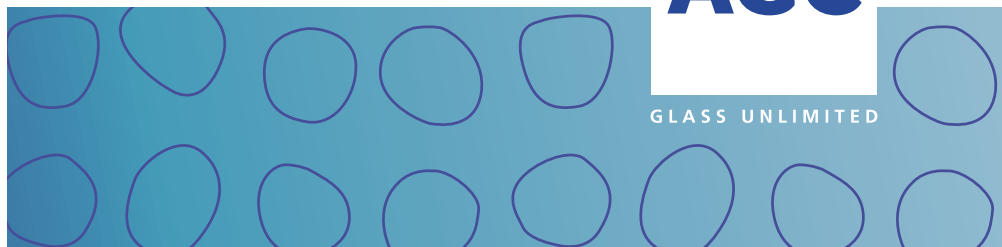

CONTENTS



IMAGIN & OLTRELUCE AESTHETIC PATTERNS

Description:

Create harmony by bringing nature-inspired patterns into your home, featuring natural colours and materials.

Pattern	Pattern availability	Thicknesses* (mm)	Maximum width (mm)
Eclissi	ST	4, 6, 8 3, 5	2040
Quatrix	OR	3, 4, 5, 6, 8	1850
Space	ST	4, 6, 8 5	2040

ST Standard pattern

OR Pattern on request

* Thickness **in bold** means standard thickness

Processability and thickness tolerance:

Thickness (mm)	Thickness tolerance (EN 572-5)	Tempering	Lamination	IGU
3	± 0.5	✓	✗	✗
4	± 0.5	✓	✗	✓
5	± 0.5	✓	✗	✓
6	± 0.5	✓	✗	✓
8	± 0.8	✓	✗	✗

Physical properties:

Characteristic	Symbol	Value and unit
Density	ρ	2500 kg/m ³
Young's modulus	E	7 × 10 ¹⁰ Pa
Poisson's ratio	μ	0.2
Specific heat capacity	c_p	0.72 × 10 ³ J/(kg.K)
Coefficient of linear expansion (20-300 °C)	α	9 × 10 ⁻⁶ /K
Thermal conductivity	λ	1 W/(m.K)
Emissivity	ϵ	0.89

Compliance with European standards:

AGC Glass Europe products comply with the relevant European regulations and directives on construction products. Further information about compliance with the Construction Product Regulation (305/2011) and other relevant health and environmental legislation can be found on the AGC website: www.agc-yourglass.com.

	3 mm	4 mm	5 mm	6 mm	8 mm
Resistance to fire (EN 13501-2)	NPD	NPD	NPD	NPD	NPD
Reaction to fire (EN 13501-1)	A1	A1	A1	A1	A1
External fire performances	NPD	NPD	NPD	NPD	NPD
Burglar resistance (EN 356)	NPD	NPD	NPD	NPD	NPD
Pendulum body impact resistance (EN 12600)	NPD	NPD	NPD	NPD	NPD
Resistance against sudden temperature change and temperature differentials	NPD	NPD	NPD	NPD	NPD
Wind, snow, permanent and imposed load resistance	NPD	NPD	NPD	NPD	NPD
Direct airborne sound reduction (EN 12758): R_w (C; C_{tr})	29 (-2,-5)	30 (-2,-4)	30 (-1,-2)	31 (-2,-3)	32 (-1,-2)
U-value (EN 673)	5.8	5.8	5.8	5.7	5.7
Light transmission / Reflection (EN 410): τ_v / ρ_v / ρ'	90/8/8	90/8/8	89/8/8	89/8/8	87/8/8
Solar transmission / Reflection (EN 410): τ_e / ρ_e / $\rho'e$	86/8/8	84/8/8	82/7/7	80/7/7	77/7/7
Solar Factor: g	87	86	85	83	81
Colour Rendering (EN 410): Ra	99	99	99	98	98
UV Transmission (EN 410)	67	63	60	57	52

All related documents, such as processing guides, cleaning instructions, the complete product catalogue and CE markings can be found at www.agc-yourglass.com.

AGC GLASS EUROPE, A LEADER IN FLAT GLASS

AGC Glass Europe is the European flat glass branch of AGC, the world's leading glassmaker. Its baseline, Glass Unlimited, reflects its core assets: innovative strength in advanced glass technologies, a global sales network and an industrial presence stretching from Spain to Russia. AGC Glass Europe has representatives worldwide – See www.agc-yourglass.com for further addresses.

IMAGIN & OLTRELUCE CLEAR PATTERNED GLASS




Space[®]

Description:

In these patterns, balanced aesthetics help keep your interiors up with the latest trends.

Applications:

- furniture
- showers
- partitions
- doors
- windows
- façades
- atriums
- roofs
- etc.

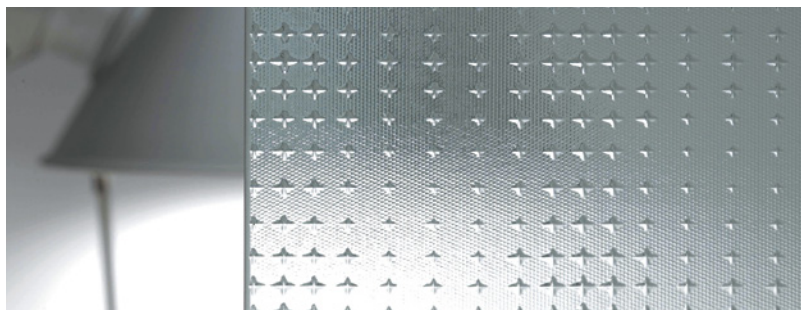

Pattern availability:

Standard	
Thickness (mm)	Dimensions* (length x width in mm)
4	3350 x 1850
6	3350 x 2040
8	

Non-standard	
Thickness (mm)	Maximum dimensions (length x width in mm)
5	3750 x 2040

* maximum dimensions 3750 x 2040 mm

Minimum order:

Non-standard thickness: half load can be produced during standard pattern run.


Pattern description:

Direction	Dimensions of pattern element	Relief	Longitudinal pattern deviation	Crosswise pattern deviation
No	—	—	3 mm / 1 m	6 mm / 1 m


Special information:

Can be silvered and back painted on request by manufacturer.
Pattern Oltreluce Space © Michele De Lucchi

Similar patterns:



ST Standard pattern



OR Pattern on request

Processability and thickness tolerance:

Thickness (mm)		Thickness tolerance (EN 572-5)	Tempering	Lamination	IGU
Standard	Non-standard				
4		± 0.5	✓	✗	✓
	5	± 0.5	✓	✗	✓
6		± 0.5	✓	✗	✓
8		± 0.8	✓	✗	✗

Physical properties:

Characteristic	Symbol	Value and unit
Density	ρ	2500 kg/m ³
Young's modulus	E	7 × 10 ¹⁰ Pa
Poisson's ratio	μ	0.2
Specific heat capacity	c_p	0.72 × 10 ³ J/(kg.K)
Coefficient of linear expansion (20-300 °C)	α	9 × 10 ⁻⁶ /K
Thermal conductivity	λ	1 W/(m.K)
Emissivity	ϵ	0.89

Compliance with European standards:

AGC Glass Europe products comply with the relevant European regulations and directives on construction products. Further information about compliance with the Construction Product Regulation (305/2011) and other relevant health and environmental legislation can be found on the AGC website: www.agc-younglass.com.

	4 mm	5 mm	6 mm	8 mm
Resistance to fire (EN 13501-2)	NPD	NPD	NPD	NPD
Reaction to fire (EN 13501-1)	A1	A1	A1	A1
External fire performances	NPD	NPD	NPD	NPD
Burglar resistance (EN 356)	NPD	NPD	NPD	NPD
Pendulum body impact resistance (EN 12600)	NPD	NPD	NPD	NPD
Resistance against sudden temperature change and temperature differentials	NPD	NPD	NPD	NPD
Wind, snow, permanent and imposed load resistance	NPD	NPD	NPD	NPD
Direct airborne sound reduction (EN 12758): R_w (C; C_{tr})	30 (-2,-4)	30 (-1,-2)	31 (-2,-3)	32 (-1,-2)
U-value (EN 673)	5.8	5.8	5.7	5.7
Light transmission / Reflection (EN 410): τ_v / ρ_v / ρ'	90/8/8	89/8/8	89/8/8	87/8/8
Solar transmission / Reflection (EN 410): τ_e / ρ_e / $\rho'e$	84/8/8	82/7/7	80/7/7	77/7/7
Solar Factor: g	86	85	83	81
Colour Rendering (EN 410): Ra	99	99	98	98
UV Transmission (EN 410)	63	60	57	52

All related documents, such as processing guides, cleaning instructions, the complete product catalogue and CE markings can be found at www.agc-younglass.com.

AGC GLASS EUROPE, A LEADER IN FLAT GLASS

AGC Glass Europe is the European flat glass branch of AGC, the world's leading glassmaker. Its baseline, Glass Unlimited, reflects its core assets: innovative strength in advanced glass technologies, a global sales network and an industrial presence stretching from Spain to Russia. AGC Glass Europe has representatives worldwide – See www.agc-younglass.com for further addresses.